

## The Kent Range of Metering Products

### Pulse Units

#### For retro-fitting to H4000, S2000, C4000 and C4200 meters

The H4000 Woltmann, S2000 Commercial single jet and C4000 and C4200 Combination meters, all have the facility for various types of pulse transmission, compatible with a wide range of data collection equipment.

Three versions of pulse unit are available. Two are dovetail designs, one being the conventional reed switch, (PG100), the other is an optical device (PV14 – German spec.) There is also a bi-directional optical pulse unit, (BPG20), designed to measure flows in either forward or reverse direction.

**PG100** Uni-directional dovetail reed switch sensor for fitting to both copper can and polymer counters. (Produces pulses for forward and reverse with **no** direction identification).

**PV14** Uni-directional dovetail optical sensor for fitting to polymer counters only. (Produces pulses for forward and reverse with **no** direction identification).

**BPG20** Bi-directional optical sensor for fitting to copper can counters only. (Produces pulses for forward and reverse, with direction identification).

(The two dovetail pulse units are identified by pulse unit body colour. The PG100 (reed switch) is black, and the PV14 (optical switch) is clear.

The BPG20 has an in-line signal-processing unit, fitted close to the sensor head.



## Counter Versions

The counter is available in three versions, detailed below (A, B and C).

Pulse output 40mm – 125mm				
Option	1:1 Optical	1:10 Reed	1:100 Reed	1:1000 Reed
A	✓			
B	✓		✓	✓
C	✓	✓		✓


Pulse output 150mm – 300mm				
Option	1:10 Optical	1:100 Reed	1:1000 Reed	1:10000 Reed
A	✓			
B	✓		✓	✓
C	✓	✓		✓

1 pulse/  
1 litre  
(optical)

1 pulse/  
1000 litres  
(reed)


1 pulse/  
10 litre  
(optical)

1 pulse/  
10000 litres  
(reed)



1 pulse/  
10 litres  
(reed)

1 pulse/  
100 litres  
(reed)

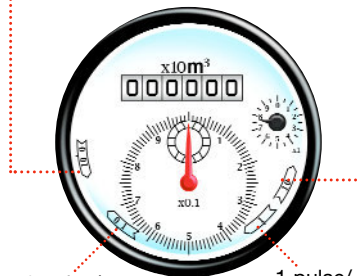

1 pulse/  
100 litres  
(reed)

1 pulse/  
1000 litres  
(reed)

Illustrations are for diagrammatical purposes only.

The dovetail slot position and pulsed output value, correspond to the markings on the dial face.

# Copper Can Counters

---

## Uni-directional Reed Switch (PG100)

A magnetically operated (reed switch) pulsed output, facility is provided, by the retrofitting of a dedicated 'dovetail' pulse unit to the copper can counter. The pulse unit is fitted with a 100  $\Omega$  series resistor to protect the reed switch from power surges and is usually provided with a 5 metre length of cable, terminating in a sealed flying lead.

## Location and Operating Principle

The volt free switch closure is generated by the rotation of integral magnets, set within the circumference of the counter. There are three options available (not all active), dependant on counter version, (A, B or C) specified on the order. The pulse frequencies at the various slot positions (not visible with the shroud in place), correspond to the markings on the dial face.

## PG100 Pulse Unit Fitting Instructions: (Copper can counter)

There are two opposing screws holding the shroud in place. Remove these and lift the shroud clear from the counter assembly. This will expose the plastic sensor holder surrounding the copper can counter. Select the appropriate pulse position as detailed on the dial face and remove the plastic closure panel from the holder, exposing the copper can.



Closure panel removed exposing copper can (magnet position).



PG100 fitted in position.

Hold the reed switch pulse unit at cable entry point in a vertical position and clip into place by locating the front dovetail edge, under the locating lug, applying pressure towards the counter, until the rear dovetail edge, snaps under the sensor holder. The pulse unit is now self-positioned with the internal magnet. Run the cable anti-clockwise inside the yellow base ring, to the most convenient exit slot, ensuring the small cable restraint is enclosed within the base ring. Re-fit the shroud with the two screws.

**Note:** The counter must be aligned with the m3 marking on the dial face, adjacent to the lid hinge position, to allow the shroud to be re-fitted correctly.

## Cable Identification and Wiring Details

The factory potted cable is defined as 4 x 7 / 0.3mm with Red, Blue, Black and Yellow as the core colours, contained within a white outer sheath. RED and BLUE are the volt free pair of contacts, therefore Black and Yellow cores can be cut back and discarded.

### Maximum output ratings:

Reed switch rating:	24 Vdc maximum working voltage.
Maximum current:	50 mA
Maximum power:	0.25 Watts
Switch closure duty cycle:	15% on, 85% off typically.

## Copper Can Counters – BPG20

---

### Bi-directional Optical Switch (BPG20)

The BPG20 (optical switch) is designed to measure flow in either forward or reverse direction. The circuitry provides bi-directional information, via four open collector output connections. It is usually provided with a 5 metre length of cable, from the signal processing unit, terminating in a sealed flying lead.

### Location and Operating Principle

There are two threaded inserts in the counter shroud, which take the captive thumbscrews located in the BPG20 sensor. The pulse from the BPG20 (optical switch) is generated by viewing through the glass face and detecting the rotation of the

reflective disc. This will provide 1 Pulse / Litre from meter sizes 40mm – 125mm and 1 Pulse / 10 Litres from sizes 150mm – 300mm. Please refer to cable identification and electrical data.

## BPG20 Pulse Unit Fitting Instructions: (Copper can counter)

Remove the two cover plugs on the top of the shroud, exposing the screw inserts. Place the BPG20 in position over the glass face, and tighten the thumbscrews, evenly clamping down on the sealing gasket. It is essential that no water passes between the sensor face and the reflective disc as this will distort the view and cause a false reading or malfunction. The sealing gasket (detailed below), is designed to reduce the risk of water ingress and when sealed correctly will ensure a consistent optical characteristic.



Captive thumb screws

Viewed from underneath showing optical sensor



Sealing gasket

## Cable Identification and Wiring Details

Function	Wire colour
Pulses (forward and reverse)	Green
Direction (Hi = forward, Lo = reverse)	Blue
Forward pulses	Yellow
Reverse pulses	White
Positive supply	Red
Negative supply 0 V	Black
Screen – connected to 0 V (or instrument earth)	



fieldsmart technology



ADRwater

**AUCKLAND**  
8 BEATRICE TINSLEY CRES  
ROSEDALE 0632  
PO BOX 302, 248, NORTH HARBOUR  
AUCKLAND 0751  
T: (09) 444 2350 F: (09) 444 3085

**HAMILTON**  
1/21 RAILSIDE PLACE  
DINSDALE 3204  
PO BOX 230  
RAGLAN 3265  
T: (07) 846 0602 F: (07) 846 0604

**WELLINGTON HEAD OFFICE**  
137 THORNDON QUAY  
WELLINGTON 6011  
PO BOX 3749  
WELLINGTON 6140  
T: (04) 472 7614 F: (04) 472 7658

**CHRISTCHURCH**  
UNIT 4, 89 VICKERYS ROAD  
WIGRAM 8042  
PO BOX 11 033, SOCKBURN  
CHRISTCHURCH 8443  
T: (03) 379 2628 F: (03) 379 2627