


H 4300 Woltmann meter

The hot water flow sensor for installation in any orientation



Approval								
<table border="1"><tr><td>22.56</td></tr><tr><td>01.01</td></tr></table>	22.56	01.01	<table border="1"><tr><td>22.16</td></tr><tr><td>87.01</td></tr></table>	22.16	87.01	<table border="1"><tr><td>22.56</td></tr><tr><td>03.02</td></tr></table>	22.56	03.02
22.56								
01.01								
22.16								
87.01								
22.56								
03.02								
WP DN 50/65	WP DN 80 ... DN 125	WP DN 150/200						

- Woltmann meter flow sensor WP for hot water
- Nominal size DN 50 up to 200
- High temperature load up to 120 °C
- Highly durable tungsten carbide/
sapphire jewel rotor bearings
- Serial pulse output

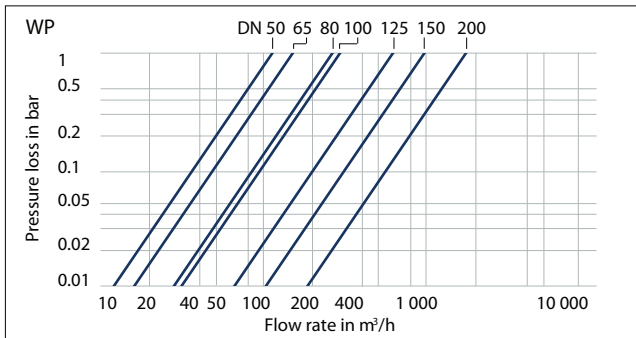


Woltmann meter WP		H 4300							
Nominal size / Connection flange		DN	50	65	80	100	125	150	200
Meter size / Nominal flow rate		Q _n (Q _p)	15	25	40	60	100	150	250
Ordering number	Initial certification class A*								
Litres/pulse			100	100	100	100	100	1000	1000
PN10	4-hole (old standard)		—	—	0002009	—	—	—	0002014
PN16			0002007	0002008	0002010	0002011	0002012	0002013	0002015
L Length	mm		200	200	225	250	250	300	350
B Width	mm		155	155	200	220	250	285	340
H ₁ Centerline height	mm		75	83	92	110	125	135	163
H ₂ Overall height	mm		200	206	292	310	325	379	407
Weight	kg		11	11.5	18	20	22.4	39	47
Performance characteristics									
Maximum flow rate	Q _{max} (Q _i)	m ³ /h	30	30	90	200	200	300	500
Minimum flow rate	Q _{min} (Q _i)	m ³ /h	0.55	0.55	2	2.4	3.5	4.5	8
Starting flow		m ³ /h	0.13	0.13	0.27	0.5	0.8	1.7	2.0
Continuous loading		m ³ /h	50	70	40	60	100	450	800
Temperature**	T _{max}	°C	120	120	120	120	120	120	120
Pressure rating	PN	bar	16	16	10/16	16	16	16	10/16
Flow capacity	at 0.1 bar pressure loss	m ³ /h	35	63	85	95	200	310	560

* other types on request

** Register heightening for T_{max} 130 °C on request

Contact output
Version Reed switch potted,
Protection class IP 68
Contact load max. 24 V DC, 200 mA
Resistance 100 Ohm/0.25 W
Cable length 3 m

Pulse value
Available pulse sequences: 25 - 100 - 250 - 1000 litres/pulse
Standard version DN 50-125: 100 litres/pulse
Standard version DN 150-200: 1000 litres/pulse

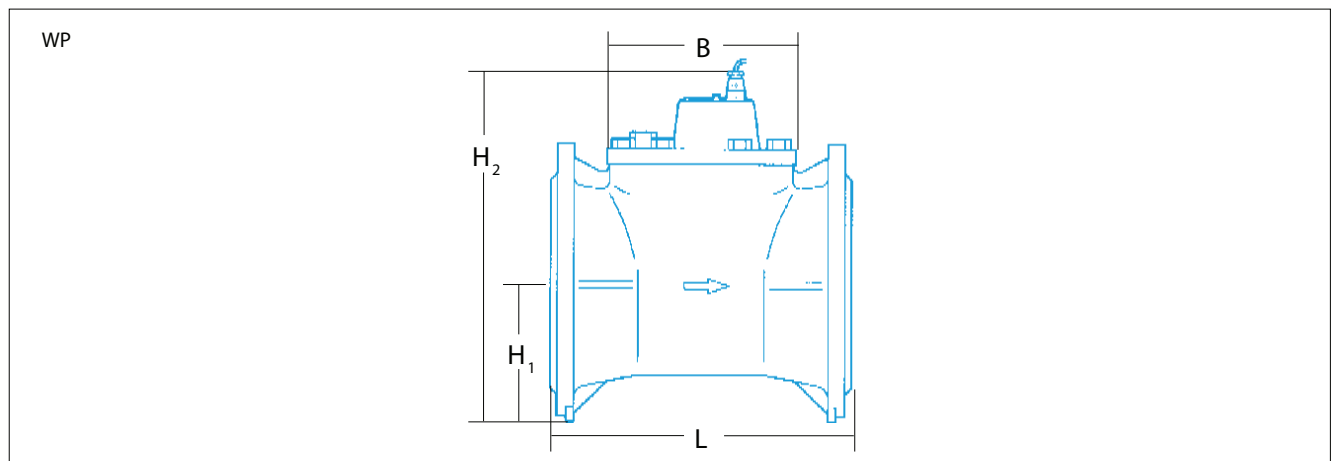

fieldsmart technology



ADRwater

AUCKLAND
8 BEATRICE TINSLEY CRES
ROSEDALE 0632
PO BOX 302-248, NORTH HARBOUR
AUCKLAND 0751
T: (09) 444 2350 F: (09) 444 3085

HAMILTON
1/21 RAILSIDE PLACE
DINSDALE 3204
PO BOX 230
RAGLAN 3265
T: (07) 846 0602 F: (07) 846 0604

WELLINGTON HEAD OFFICE
137 THORNDON QUAY
WELLINGTON 6011
PO BOX 3749
WELLINGTON 6140
T: (04) 472 7614 F: (04) 472 7658

CHRISTCHURCH
UNIT 4, 89 VICKERYS ROAD
WIGRAM 8042
PO BOX 11 033, SOCKBURN
CHRISTCHURCH 8443
T: (03) 379 2628 F: (03) 379 2627